


## Down Light Product Specifications

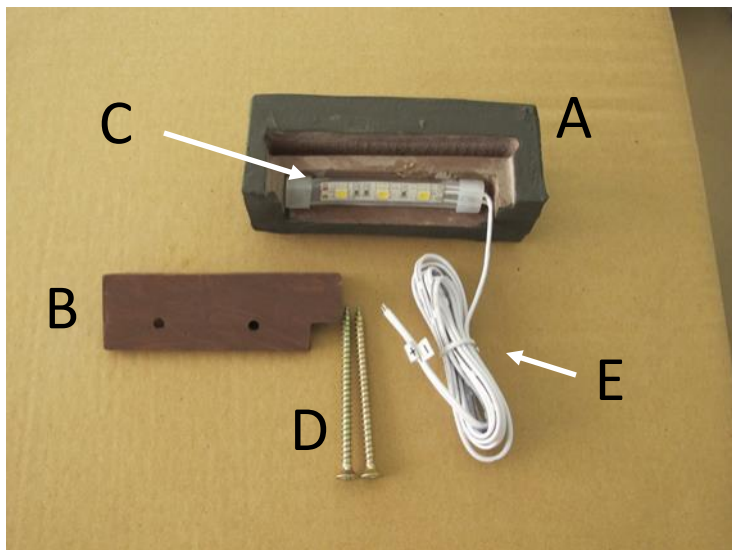

A– Downlight Polyurethane- 4 1/2" L x 1 1/2"H x 1 3/4"W

B– Mounting bracket– 4" x 1"- High Density PU

C– LED Light strip– 3 1/8"L x 1/2"W

D– Mounting screws -2" Galvanized (Qty– 2)

E– Supply Line– 59"

Light Set include 1 small strip. Each strip adopts high quality 3pcs SMD5050 as lighting-emitting component, then connected by 2468 wires. All the strips takes silicon gel coat, silicon gel embedment, which greatly improves heat dissipation of the light. It has features of long life, high stabilization, anti-UV, anti-friction, energy saving, friendly environmental protection, artistic appearance. IP grade is IP67. Higher waterproofness, more convenient and simple for field maintenance. This product can be used in -10°C~65°C outdoor severe environment, and will not colloid harden and yellow. Light colors are homogeneous.

### Scope of Product Use

This product is widely applied in indoor and outdoor outline lighting and sign lighting, etc, especially applied to decorative lighting in indoor and outdoor severe environment, gardens, amusement parks, theatres, halls and corridors.

|                               |                                                                             |  |
|-------------------------------|-----------------------------------------------------------------------------|--|
| Model                         | Customized Flexible Strip                                                   |  |
| Light Source                  | SMD 5050 LED, Epistar chip                                                  |  |
| LED Amount                    | 1pc SMD5050 LEDs/strips; 60pcs SMD5050 LEDs/meter                           |  |
| LED Power Rating              | 0.24W/LED; 0.72W/strip                                                      |  |
| Rated Operational Voltage (V) | DC12V                                                                       |  |
| Strips Power                  | 0.72W/strip                                                                 |  |
| Size                          | L77mm*W12.8*H5mm. Overall length 158 cm                                     |  |
| Weight                        | 53 grams                                                                    |  |
| Working Temperature           | working temperature: -10°C—+65°C                                            |  |
| IP Grade                      | IP67                                                                        |  |
| Waterproof Structure          | PE casing potting smidakh waterproof                                        |  |
| Wire Rod                      | 150mm 2468wires attached from strip; directly welded without any connectors |  |
| Light Color                   | Warm White ~ 3000-3200 ° K                                                  |  |